

# STATUS LIGHT

**ATEX Exdb IIC - T6 - IP66**




**Material Aluminium LM6**

**Xeno flash**

**EVC6JSF... (6J 29cd)**

**EVC16JSF... (16J 300cd)**

**EVC21JSF... (21J 350cd)**

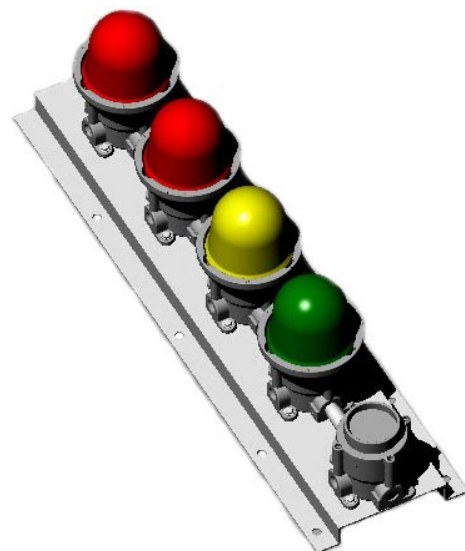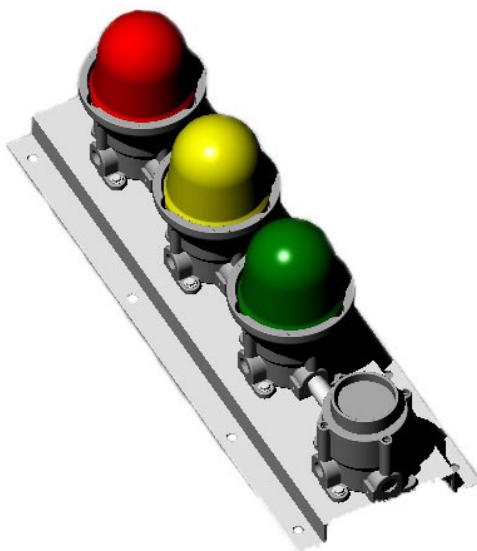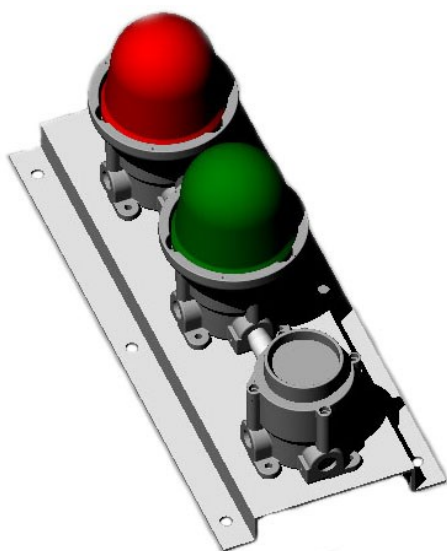



# EVC6JSF...

zone 1

zone 2

Ex db IIC Gb Ex tb IIIC Db II2GD

T6

T 85°C

-20°C

+60°C

zone 21

zone 22

DIRECTIVE 2014/34/UE

STATUS LAMP EVC FLASH 6J

STATUS LAMP EVC FLASH 6J

IP66



Prodotti per Lampade allo Xeno

Intensità luminosa  
Effective Intensity  
6J 29Cd

Lo status lamp (EVC6JSF...) è formato da lampade EVC50 in alluminio il tutto assemblato su una piastra stainless steel. Questo status lamp (EVC6JSF...) è progettato per l'utilizzo in atmosfere potenzialmente esplosive e con condizioni ambientali difficili, come offshore e onshore nelle industrie petrolchimiche. Può essere fornito con due, tre o quattro lampade XENO FLASH. Certificato INERIS, bassi consumi e durata illimitata.

Protezione meccanica IP66. Connessione con scatola morsettieria esterna.


Legna di alluminio a basso contenuto di rame, viteria in acciaio inox, Vetro borosilicato resistente agli urti ed alle alte temperature, gabbia in acciaio inox (su richiesta).

Status lamp (EVC6JSF...) it consists of aluminium EVC50 lamp all assembly on plate stainless steel,

These status lamp (EVC6JSF...) have been designed for use in potentially explosive atmospheres and harsh environmental conditions such as those found offshore and onshore in the petrochemical industries. It is available with two, three or four lights XENO FLASH. INERIS certificate, low consumption and high performance.

Neoprene O-RING gasket for waterproof protection IP66. Connection with external terminal jbox.

Low copper content aluminium alloy, stainless steel hardware, Shock and temperature resistant borosilicate glass, stainless steel guard (on request).

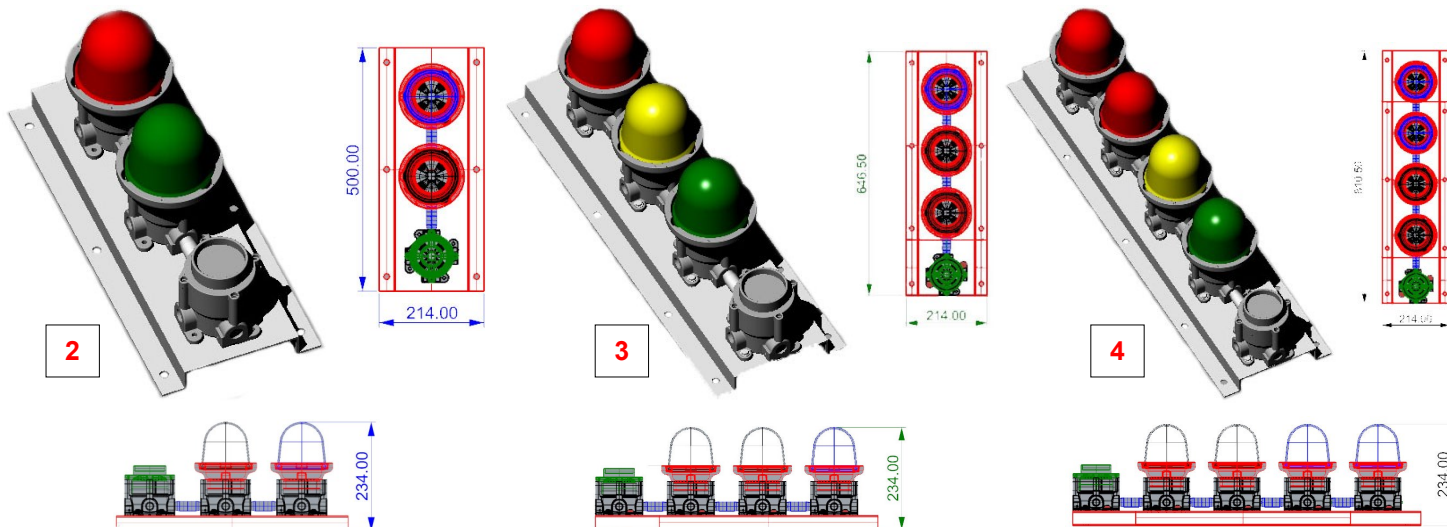

### Specifica tecnica / Technical specification

Tensione / Voltage	12-24 VAC/DC	48 VAC	48 VDC	110 VAC	110 VDC	230 VAC
Corrente / Rated current	300mA		40mA		20mA	
Frequenza / Frequency	50/60HZ					
Assorbimento medio / Power middle	2W		1,8W		4,5W	
Lamp power / Effective Intensity	6J 29Cd					
Flash-minuto / Flash-minut	75 (other to be defined)					
Servizio / Service	Continuo / Continuous					
Colore corpo / Color body	RED RAL 3000 / Other color on request					
Imbocchi / Cable entries	JBOX 3 x 3/4"					

COLORI GEMME: (R) ROSSO - (Y) GIALLO - (A) ARANCIO - (G) VERDE - (BL)BLU - (W) BIANCO  
Signaling lamps: (R) Red - (Y) yellow - (A) orange - (G) green - (BL) blue - (W) white

### CODICE ORDINE - CODE ORDER

	NUMERO LAMPADE LAMP NUMBER	TENSIONE VOLTAGE	COLORE GEMME COLORE SIGNALING LAMP
EVC6JSF ... ..	2	12VAC/DC or 24VAC/DC	(R) Red - (Y) yellow
	3	48VAC or 48VDC	(A) orange - (G) green
	4	110VAC or 110VDC 230VAC	(BL) blue - (W) white

EXAMPLE / ESEMPIO  
EVC6JSF-3-24VDC-RRR

3 LAMP VOLTAGE 24VDC COLOR LAMP 3 RED  
3 LAMPADE TENSIONE 24VDC COLORE GEMME 3 ROSSE



Kroma mec S.r.l.





# EVC16JSF...

zone 1

zone 2

Ex db IIC Gb Ex tb IIIC Db II2GD

T6

T 85°C

-20°C

+60°C

zone 21

zone 22

DIRECTIVE 2014/34/UE

STATUS LAMP EVC FLASH 16J

STATUS LAMP EVC FLASH 16J

IP66



Intensità luminosa  
Effective Intensity  
16J

Lo status lamp (EVC16JSF...) è formato da lampade EVC50 in alluminio il tutto assemblato su una piastra stainless steel. Questo status lamp (EVC16JSF...) è progettato per l'utilizzo in atmosfere potenzialmente esplosive e con condizioni ambientali difficili, come offshore e onshore nelle industrie petrolchimiche. Può essere fornito con due, tre o quattro lampade XENO FLASH. Certificato INERIS, bassi consumi e durata illimitata.

Protezione meccanica IP66. Connessione con scatola morsettieria esterna.



Legna di alluminio a basso contenuto di rame, viteria in acciaio inox, Vetro borosilicato resistente agli urti ed alle alte temperature, gabbia in acciaio inox (su richiesta).

Status lamp (EVC16JSF...) it consists of aluminium EVC50 lamp all assembly on plate stainless steel,



These status lamp (EVC16JSF...) have been designed for use in potentially explosive atmospheres and harsh environmental conditions such as those found offshore and onshore in the petrochemical industries. It is available with two, three or four lights XENO FLASH. INERIS certificate, low consumption and high performance.

Neoprene O-RING gasket for waterproof protection IP66. Connection with external terminal jbox.



Low copper content aluminium alloy, stainless steel hardware, Shock and temperature resistant borosilicate glass, stainless steel guard (on request).

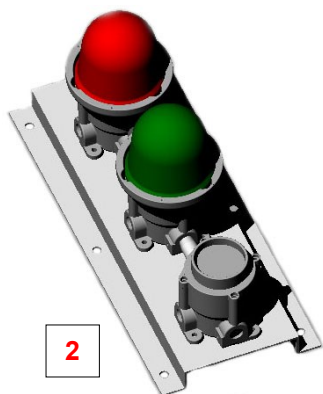




2

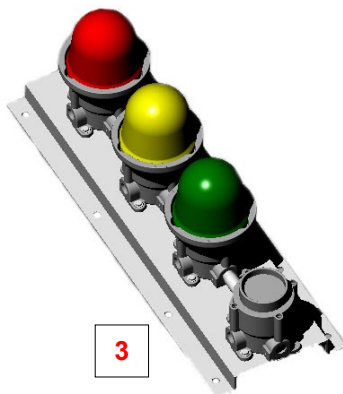

3

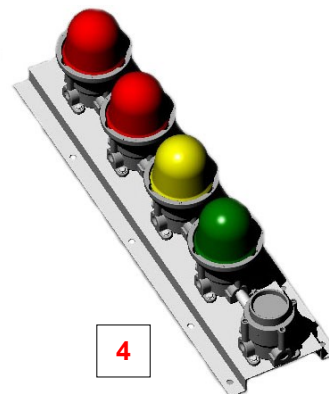

4



### Specifica tecnica / Technical specification

Tensione / Voltage	12-24 VAC/DC	48 VAC	48 VDC	110 VAC	110 VDC	230 VAC
Corrente / Rated current	350mA		80mA		40mA	
Frequenza / Frequency	50/60HZ					
Assorbimento medio / Power middle	10W~					
Lamp power / Effective Intensity	16J 300Cd					
Flash-minuto / Flash-minut	30 (other to be defined)					
Servizio / Service	Continuo / Continuous					
Colore corpo / Color body	RED RAL 3000 / Other color on request					
Imbocchi / Cable entries	JBOX 3 x 3/4"					

COLORI GEMME: (R) ROSSO - (Y) GIALLO - (A) ARANCIO - (G) VERDE - (BL)BLU - (W) BIANCO  
Signaling lamps: (R) Red - (Y) yellow - (A) orange - (G) green - (BL) blue - (W) white

### CODICE ORDINE - CODE ORDER

	NUMERO LAMPADE LAMP NUMBER	TENSIONE VOLTAGE	COLORE GEMME COLORE SIGNALING LAMP
EVC16JSF ... ..	2	12VAC/DC or 24VAC/DC	(R) Red - (Y) yellow
	3	48VAC or 48VDC	(A) orange - (G) green
	4	110VAC or 110VDC 230VAC	(BL) blue - (W) white

EXAMPLE / ESEMPIO  
EVC16JSF-3-24VDC-RRR

3 LAMP VOLTAGE 24VDC COLOR LAMP 3 RED  
3 LAMPADE TENSIONE 24VDC COLORE GEMME 3 ROSSE



Kroma mec S.r.l.



# EVC21JSF...

zone 1

zone 2

Ex db IIC Gb Ex tb IIIC Db II2GD

T6

T 85°C



zone 21

zone 22

DIRECTIVE 2014/34/UE



STATUS LAMP EVC FLASH 21J

STATUS LAMP EVC FLASH 21J

IP66



Prodotti per Lampade allo Xeno

Intensità luminosa  
Effective Intensity  
21J

Lo status lamp (EVC21JSF...) è formato da lampade EVC50 in alluminio il tutto assemblato su una piastra stainless steel. Questo status lamp (EVC21JSF...) è progettato per l'utilizzo in atmosfere potenzialmente esplosive e con condizioni ambientali difficili, come offshore e onshore nelle industrie petrolchimiche. Può essere fornito con due, tre o quattro lampade XENO FLASH. Certificato INERIS, bassi consumi e durata illimitata.

Protezione meccanica IP66. Connessione con scatola morsettieria esterna.



Lega di alluminio a basso contenuto di rame, viteria in acciaio inox, Vetro borosilicato resistente agli urti ed alle alte temperature, gabbia in acciaio inox (su richiesta).

Status lamp (EVC21JSF...) it consists of aluminium EVC50 lamp all assembly on plate stainless steel,



These status lamp (EVC21JSF...) have been designed for use in potentially explosive atmospheres and harsh environmental conditions such as those found offshore and onshore in the petrochemical industries. It is available with two, three or four lights XENO FLASH. INERIS certificate, low consumption and high performance.

Neoprene O-RING gasket for waterproof protection IP66. Connection with external terminal jbox.



Low copper content aluminium alloy, stainless steel hardware, Shock and temperature resistant borosilicate glass, stainless steel guard (on request).

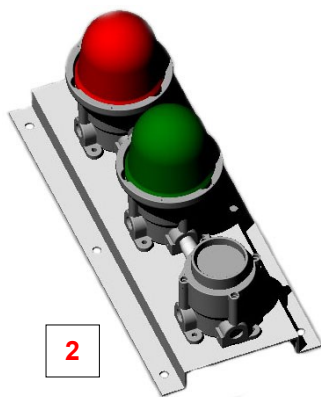




2

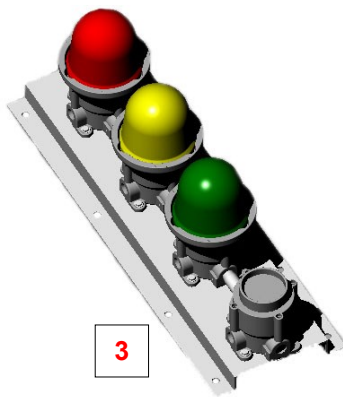

3

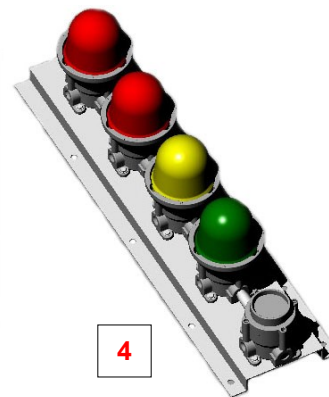

4



### Specifica tecnica / Technical specification

Tensione / Voltage	12-24 VAC/DC	48 VAC	48 VDC	110 VAC	110 VDC	230 VAC
Corrente / Rated current	350mA		100mA		25mA	
Frequenza / Frequency	50/60HZ					
Assorbimento medio / Power middle	11W~					
Lamp power / Effective Intensity	21J 350Cd					
Flash-minuto / Flash-minut	30 (other to be defined)					
Servizio / Service	Continuo / Continuous					
Colore corpo / Color body	RED RAL 3000 / Other color on request					
Imbocchi / Cable entries	JBOX 3 x 3/4"					

COLORI GEMME: (R) ROSSO - (Y) GIALLO - (A) ARANCIO - (G) VERDE - (BL)BLU - (W) BIANCO  
Signaling lamps: (R) Red - (Y) yellow - (A) orange - (G) green - (BL) blue - (W) white

### CODICE ORDINE - CODE ORDER

	NUMERO LAMPADE LAMP NUMBER	TENSIONE VOLTAGE	COLORE GEMME COLORE SIGNALING LAMP
EVC21JSF ... ..	2	12VAC/DC or 24VAC/DC	(R) Red - (Y) yellow
	3	48VAC or 48VDC	(A) orange - (G) green
	4	110VAC or 110VDC 230VAC	(BL) blue - (W) white

EXAMPLE / ESEMPIO  
EVC21JSF-3-24VDC-RRR  
3 LAMP VOLTAGE 24VDC COLOR LAMP 3 RED  
3 LAMPADE TENSIONE 24VDC COLORE GEMME 3 ROSSE



Kroma mec S.r.l.







**Via dell'Informatica 22 - 20083 Gaggiano (MI) ITALY**  
**Tel:+39-029081760 Fax:+39-029081791**  
**Email: [kromamec@kromamec.it](mailto:kromamec@kromamec.it) Web Site: [www.kromamec.it](http://www.kromamec.it)**