

EVG..LS..

zone 1

zone 2

Ex db IIC Gb Ex tb IIIC Db II2GD

T6
T 85°C

-20°C

zone 21

zone 22

DIRECTIVE 2014/34/UE

+60°C

STATUS LAMP LED S

STATUS LAMP LED S

IP66



Lo Status Lamp LED S è prodotto in alluminio, con un grado di protezione e un rendimento luminoso elevato. Questo Status Lamp è stato progettato per l'utilizzo in atmosfere potenzialmente esplosive e con condizioni ambientali difficili, come offshore e onshore nelle industrie petrolchimiche. Può essere fornito con una, due, tre o quattro lampade LED.

Status Lamp LED S manufactured in copper-free aluminium alloy, with a high ingress protection and light output. These Status Lamps have been designed for use in potentially explosive atmospheres and harsh environmental conditions such as those found offshore and onshore in the petrochemical industries. It is available with one, two, three or four lights LED.



EVG50(01LS)





EVG50(02LS)

EVG50(03LS)

EVG50(04LS)

- COSTRUZIONE**
- Corpo in lega di alluminio esente rame
 - Vetro borosilicato
 - Portalamпада in ceramica E27
 - Vite terra interna esterna acciaio Inox
 - Verniciatura epossidica RAL 3000
- ACCESSORI A RICHIESTA**
- Gabbia acciaio inox

- CONSTRUCTION**
- Body in copper-free aluminium alloy
 - Borosilicate glass
 - E27 ceramic lampholder
 - Stainless steel internal and external earth screw
 - RAL 3000 epoxy coating
- ON REQUEST**
- Stainless steel guard



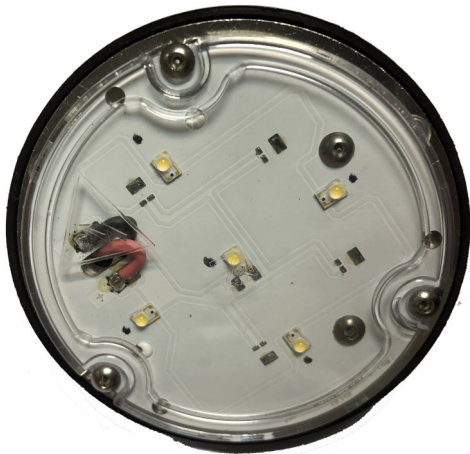


Specifica tecnica / Technical specification				
Tensione / Voltage	24 VAC/VDC	48 VAC	48 VDC	90/264 VAC/DC
Frequenza / Frequency	50/60HZ			
Assorbimento medio / Power middle	5 LED - 6W			
Potenza luminosa / Light Power	5 LED (130 LUMEN / WATT)			
Funzionamento da definire in ordine / Working to be defined on order	FISSO oppure INTERMITTENTE / FIXED or INTERMITTENT			
Colore LED / LED Color	BIANCO - BLU - GIALLO / ROSSO - VERDE - ARANCIONE / WHITE - BLUE - YELLOW - RED - GREEN - ORANGE			
Imbocchi / Cable entries	1/2" NPT or M20x1,5 or 3/4" NPT or M25x1,5			







Kroma mec S.r.l.















EVG50(01LS)..

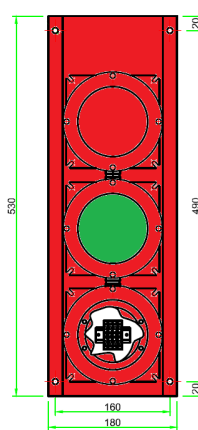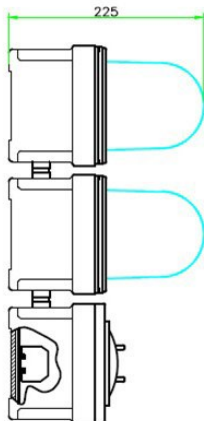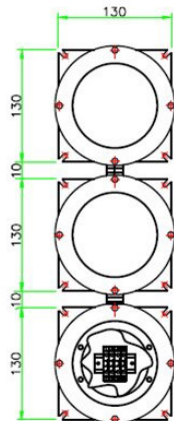


EVG50(02LS)..

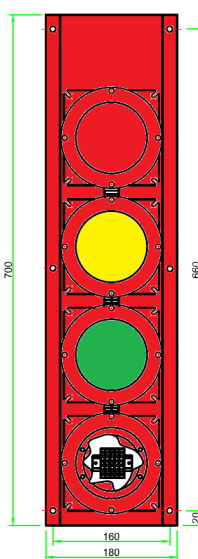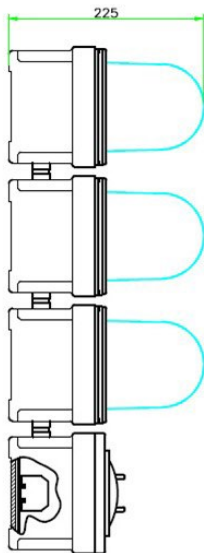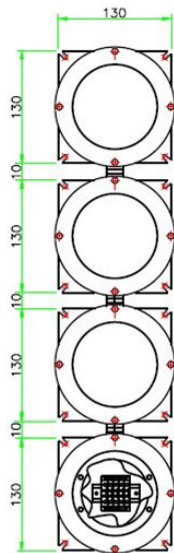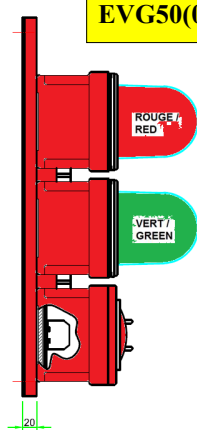

EVG50(03LS)..

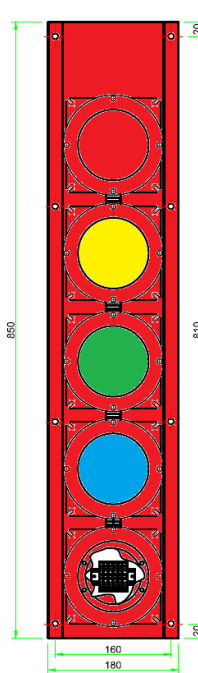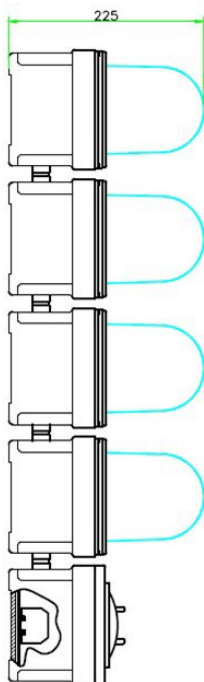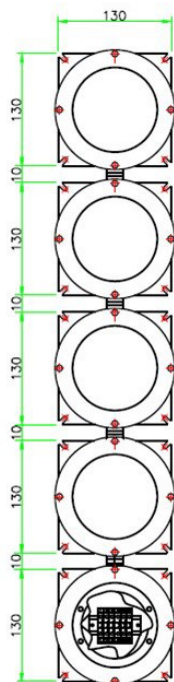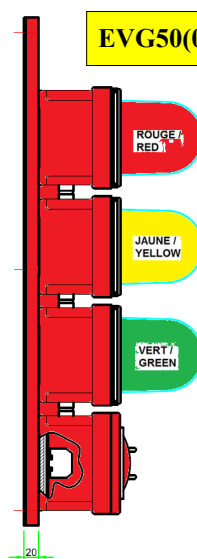


EVG50(04LS)..

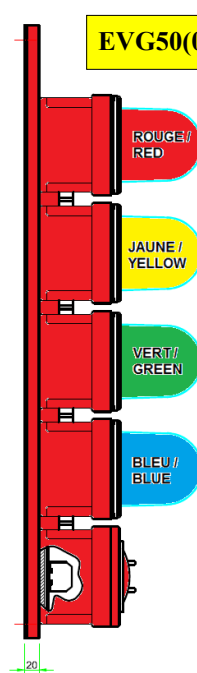


ESEMPI STATUS LAMPADRE SIRENA EXAMPLE STATUS BEACON SOUNDER

EVG50(02LS) + ETH20MD

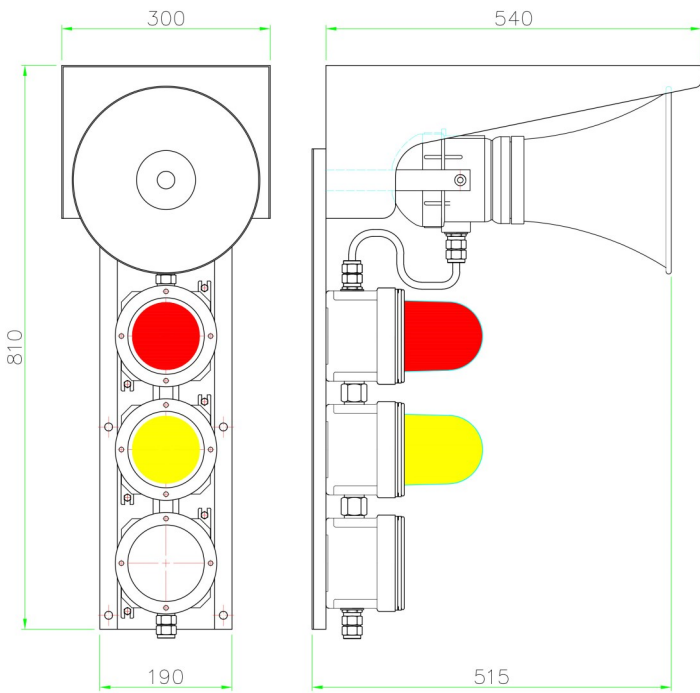

EVG50(03LS) + ETH20MD

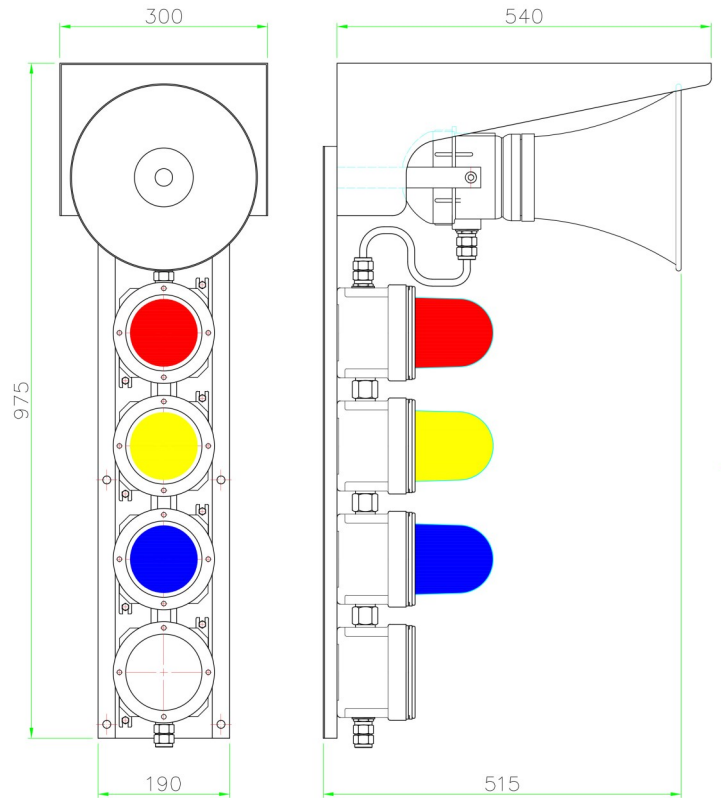

**ETH20MD 4W
5 TONI - 5 TONE**

**101/104 dB 1mt.
91/94 dB 3mt.**



**ETH20MD 10W
5 TONI - 5 TONE**

**109/112 dB 1mt.
99/102 dB 3mt.**



**ETH20MD 10W
32 TONI - 32 TONE
3 STAGE
CONTROLLO VOLUME
VOLUME CONTROL**

109/117 dB 1mt.



	STATUS	TIPICO TYPICAL	FUNZIONE LAMPADA WORKING BEACON	POTENZA LAMPADA EFFECTIVE INTENSITY	TENSIONE LAMPADA VOLTAGE BEACON	COLORE GEMME COLOR SIGNALING LAMP	COLORE CORPO COLOR BODY	N. MORSETTI + TERRE N. TERMINAL+PE JBOX	SIRENA SOUNDER
	EVG50	(01LS)	<i>(F)</i> FIXED	6W	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red	RED STD. Other to be defined	2x2,5mmq + 2x2,5mmq PE	(4) ETH20MD 4W 5 TONE (12) ETH20MD 12W 5 TONE (32) ETH20MD 12W(32) 32 TONE
		(02LS)				(R) Red (G) green		4x2,5mmq + 2x2,5mmq PE	
		(03LS)				(R) Red (Y) yellow (G) green		5x2,5mmq + 2x2,5mmq PE	
		(04LS)				(R) Red (Y) yellow (G) green (BL) blue		8x2,5mmq + 2x2,5mmq PE	
		(...LS)				(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white		..	
	STATUS	TIPICO TYPICAL	FUNZIONE LAMPADA WORKING BEACON	POTENZA LAMPADA EFFECTIVE INTENSITY	TENSIONE LAMPADA VOLTAGE BEACON	COLORE GEMME COLOR SIGNALING LAMP	COLORE CORPO COLOR BODY	N. MORSETTI + TERRE N. TERMINAL+PE JBOX	SIRENA SOUNDER
	EVG100	(01LS)	<i>(F)</i> FIXED	6W	12V 24VAC 24VDC 48VAC 48VDC 110VAC 110VDC 230VAC	(R) Red	RED STD. Other to be defined	2x2,5mmq + 2x2,5mmq PE	(4) ETH20MD 4W 5 TONE (12) ETH20MD 12W 5 TONE (32) ETH20MD 12W(32) 32 TONE
		(02LS)				(R) Red (G) green		4x2,5mmq + 2x2,5mmq PE	
		(03LS)				(R) Red (Y) yellow (G) green		6x2,5mmq + 2x2,5mmq PE	
		(04LS)				(R) Red (Y) yellow (G) green (BL) blue		8x2,5mmq + 2x2,5mmq PE	
(..LS)		(R) Red (Y) yellow (A) orange (G) green (BL) blue (W) white				..			
ESEMPIO ORDINE ORDER EXAMPLE	EVG50	(03LS)	(F)	(6W)	24VDC	(R-Y-G)			

